

SV-E60

CE 4 E60




2010.47 (eng)

Fire-resistant vertically sliding window

Fire-resistant, vertically sliding, electrically operated window which is suitable for indoor or outdoor installation. The sliding window has a frame made in powder coated steel. The SV-E60 model is specially designed for installations in which demands are made on fire resistance class E15-E60 and it is provided with 6 mm Pyran S fire resistant glass. It is automatically locked in closed position and at 50 mm intervals across the opening. Operated by control switch with hold to run buttons. S3 control system is optional.



DESIGN



Window with
one sliding
section

TECHNICAL INFORMATION


NAME	SV-E60
DESCRIPTION	Fire-resistant, vertically sliding, electrically operated window for indoor or outdoor installation.
WIDTH	600 - 1165 mm.
HEIGHT	800 - 2100 mm.
FRAME THICKNESS	80 mm.
WIDTH SIDE POSTS	60 mm.
HEIGHT TOP PROFILE	70 mm.
HEIGHT OF BOTTOM PROFILE	U-profile 25 x 25 x 25 mm.
GLASS FRAMES	40 mm.
CONSTRUCTION	Motor, transmission and automatic locking are integrated within the frame.
LOCKING	Mechanical lock which automatically locks the window in closed position and at 50 mm intervals across the opening.
POWER SUPPLY	230 V AC transformer. Options: battery backup.
CONTROL SYSTEM	Electromechanical control system with hold to run buttons. Options: S3 control system (with soft start/stop, adjustable speed, optional push-and-release buttons, optional alarm closing, etc) and various control switches.
GLASS	6 mm Pyran S, fire resistance classification E60.
SURFACE COATING	Powder coating in white is standard. Powder coating in other RAL-colours are optional.
PROTECTION AGAINST FIRE	Fire resistance classification E60. The sliding window is certified by SITAC.
MANUFACTURED BY	Please contact our sales personnel for country specific information. Svalson AB, Sweden

Visit www.svalson.com for more information.

Design and material subject to change without prior notice.



Fireslide EI30

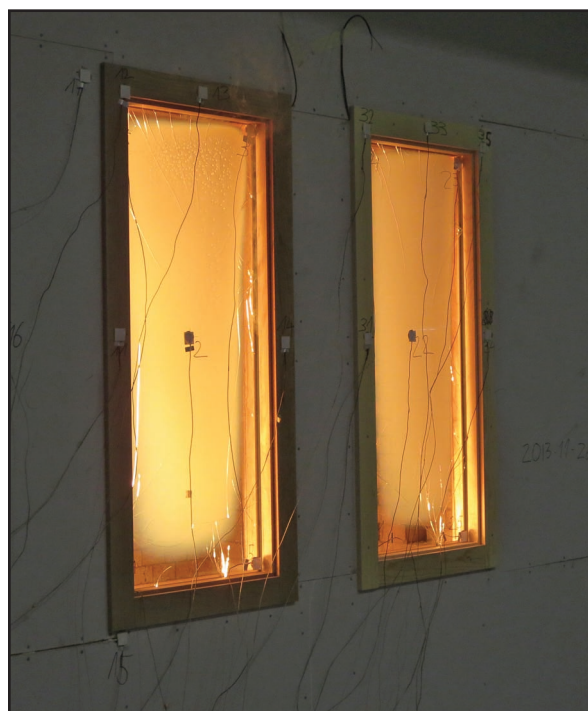


2014.xx (eng)

Fire-resistant sliding window in aluminium

Fire-resistant, electrically operated window, certified for fire resistance class EI30. The sliding window has an aluminium frame and is equipped with 18 mm Pyrostop 30-20. The Fireslide model is available in both horizontal and vertical performance and in vertical performance it can be opened either upwards or downwards. It can also be integrated into the wall with no glass in the fixed part. Fireslide EI30 is as standard provided with S3 control system with alarm closing that automatically close the window if the alarm is activated. It is automatically locked in the closed position and operated by control switch with hold to run buttons.



DESIGN

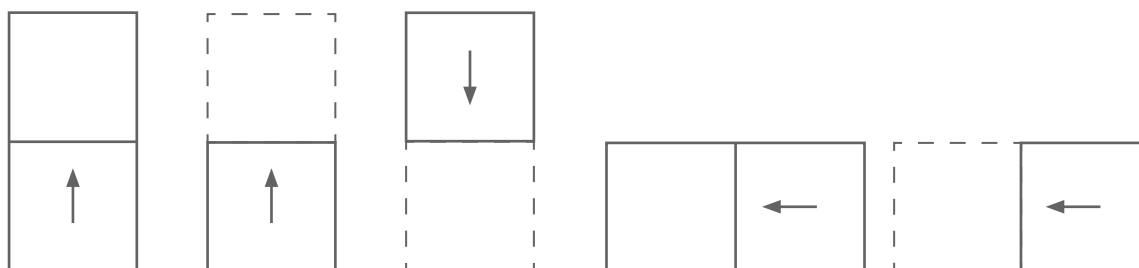

Vertically sliding
opening upwards.

Vertically sliding
opening upwards,
integrated into
wall.

Vertically sliding
opening downwards,
(O=fixed glass,
X=Sliding glass).

Horizontally sliding OX

Horizontally sliding OX,
integrated into wall.

TECHNICAL INFORMATION

NAME	Fireslide EI30
DESCRIPTION	Fire-resistant, electrically operated window in aluminium.
WIDTH	Maximum width horizontally sliding: 2600 mm. Maximum width vertically sliding: 1140 mm.
HEIGHT	Maximum height horizontally sliding: 1140 mm. Maximum height vertically sliding: 2600 mm.
FRAME THICKNESS	70 mm.
CONSTRUCTION	Motor, transmission and automatic locking are integrated within the frame.
LOCKING	Mechanical lock which automatically locks the window in the closed position.
POWER SUPPLY	230 V AC transformer. Options: battery backup.
CONTROL SYSTEM	S3 control system with soft start/stop, push-and-release buttons (press and release) and alarm closing.
GLASS	18 mm Pyrostop 30-20, fire resistance classification EI30.
SURFACE COATING	Satin anodized aluminium is standard. Powder coating in other RAL-colours are optional.
PROTECTION AGAINST FIRE	Fire resistance classification EI30.
MANUFACTURED BY	Svalson AB, Sweden
CERTIFIED BY	SP Technical Research Institute of Sweden
QUALITY CHECKED BY	SP Technical Research Institute of Sweden

Visit www.svalson.com for more information.

Design and material subject to change without prior notice.

